

DAILY €6 CAB CHASSIS SPECIFICATIONS



IVECO

Your partner for sustainable transport

DAILY SPECIFICATIONS 50C SINGLE CAB CHASSIS


DIMENSIONS (mm)

	50C18 Single Cab Euro VI			50C21 Single Cab Euro VI		
X Wheelbase	3750	4350	4750	3750	4350	4750
K Overall length	6593	7413	8278	6593	7413	8278
Body length	4135	4955	5820	4135	4955	5820
H Overall height – unladen	2264	2257	2252	2264	2257	2252
O Front track	1724	1724	1724	1724	1724	1724
N Rear track	1542	1542	1542	1542	1542	1542
T Unladen frame height at end of frame	820	820	820	820	820	820
Front ground clearance	182	182	182	182	182	182
Rear ground clearance	168	168	168	168	168	168
Y Rear overhang	1795	2015	2480	1795	2015	2480
E Overall width (Cab)	2010	2010	2010	2010	2010	2010
Turning circle kerb to kerb	13466	15348	16604	13466	15348	16604
Turning circle wall to wall	14090	15976	17234	14090	15976	17234

MASS (kg)

	50C18 Single Cab Euro VI			50C21 Single Cab Euro VI		
GVM	5200	5200	5200	5200	5200	5200
GCM	8700	8700	8700	8700	8700	8700
Towing capacity with braked trailer	3500	3500	3500	3500	3500	3500
Front axle capacity	2100	2100	2100	2100	2100	2100
Rear axle capacity	3700	3700	3700	3700	3700	3700
Kerb mass front axle	1444	1478	1488	1444	1478	1488
Kerb mass rear axle	691	690	702	691	690	702
Kerb mass total*	2135	2168	2190	2135	2168	2190
Payload capacity	2360	2327	2305	2360	2327	2305

* Kerb masses are with minimal fuel, spare wheel, tools and no driver

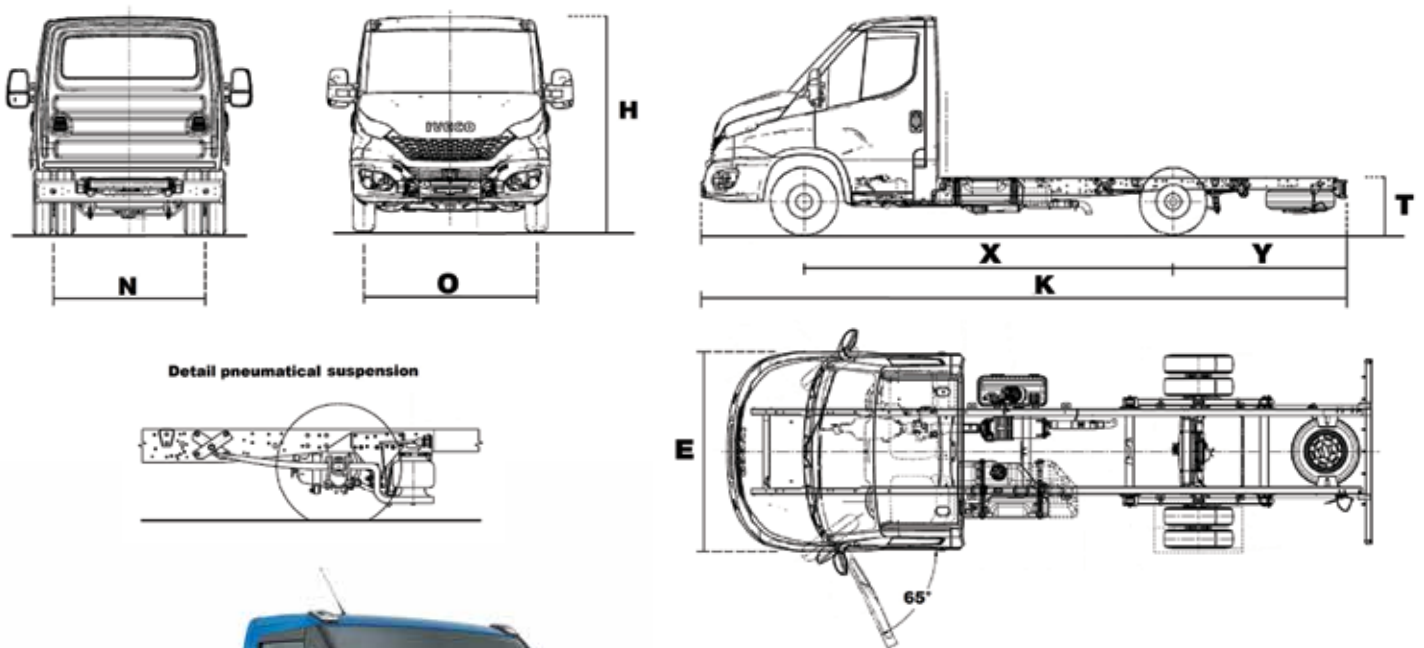

iveco.co.nz

IVECO

Your partner for sustainable transport

DAILY SPECIFICATIONS 50C DUAL CAB CHASSIS


DIMENSIONS (mm)

	50C18 Dual Cab Euro VI		50C21 Dual Cab Euro VI	
X Wheelbase	3750	4350	3750	4350
K Overall length	6593	7413	6593	7413
Body length	3385	4205	3385	4205
H Overall height – unladen	2284	2270	2284	2270
O Front track	1724	1724	1724	1724
N Rear track	1542	1542	1542	1542
T Unladen frame height at end of frame	810	810	810	810
Front ground clearance	182	182	182	182
Rear ground clearance	168	168	168	168
Y Rear overhang	1795	2015	1795	2015
E Overall width (Cab)	2010	2010	2010	2010
Turning circle kerb to kerb	13466	15348	13466	15348
Turning circle wall to wall	14090	15976	14090	15976



MASS (kg)

	50C18 Dual Cab Euro VI		50C21 Dual Cab Euro VI	
GVM	5200	5200	5200	5200
GCM	8700	8700	8700	8700
Towing capacity with braked trailer	3500	3500	3500	3500
Front axle capacity	2100	2100	2100	2100
Rear axle capacity	3700	3700	3700	3700
Kerb mass front axle	1556	1602	1556	1602
Kerb mass rear axle	778	765	778	765
Kerb mass total*	2334	2367	2334	2367
Payload capacity	2161	2128	2161	2128

* Kerb masses are with minimal fuel, spare wheel, tools and no driver

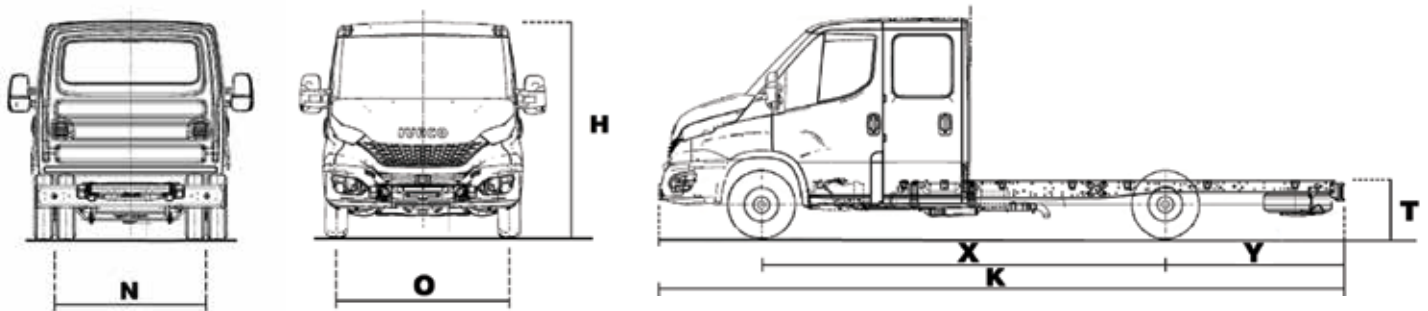

Detail pneumatical suspension

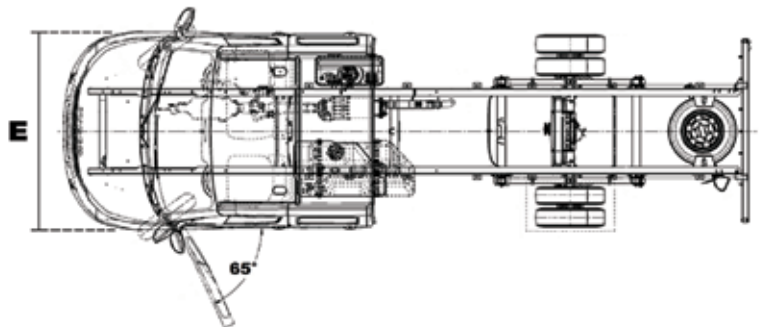

DAILY SPECIFICATIONS 70C SINGLE CAB CHASSIS

DIMENSIONS (mm)


	70C18 Single Cab Euro VI			70C21 Single Cab Euro VI		
X Wheelbase	4350	4750	5100	4350	4750	5100
K Overall length	7413	8278	8278	7413	8278	8278
Body length	4955	5820	5820	4955	5820	5820
H Overall height – unladen	2305	2299	2295	2305	2299	2295
O Front track	1725	1725	1725	1725	1725	1725
N Rear track	1660	1660	1660	1660	1660	1660
T Unladen frame height at end of frame	930	930	930	930	930	930
Front ground clearance	165	165	165	165	165	165
Rear ground clearance	169	169	169	169	169	169
Y Rear overhang	2015	2480	2130	2015	2480	2130
E Overall width (Cab)	2052	2052	2052	2052	2052	2052
Turning circle kerb to kerb	14866	16078	17162	14866	16078	17162
Turning circle wall to wall	15518	16734	17790	15518	16734	17790

MASS (kg)

	70C18 Single Cab Euro VI			70C21 Single Cab Euro VI		
GVM	7200	7200	7200	7200	7200	7200
GCM	10500*	10500*	10500*	10500	10500	10500
Towing capacity with braked trailer	3500	3500	3500	3500	3500	3500
Front axle capacity	2500	2500	2500	2500	2500	2500
Rear axle capacity	5350	5350	5350	5350	5350	5350
Kerb mass front axle	1562	1569	1563	1562	1569	1563
Kerb mass rear axle	927	944	962	927	944	962
Kerb mass total**	2489	2513	2525	2489	2513	2525
Payload capacity	4711	4687	4675	4711	4687	4675

* 10500kg limit if optioned with Hi-Matic transmission

** Kerb masses are with minimal fuel, spare wheel, tools and no driver

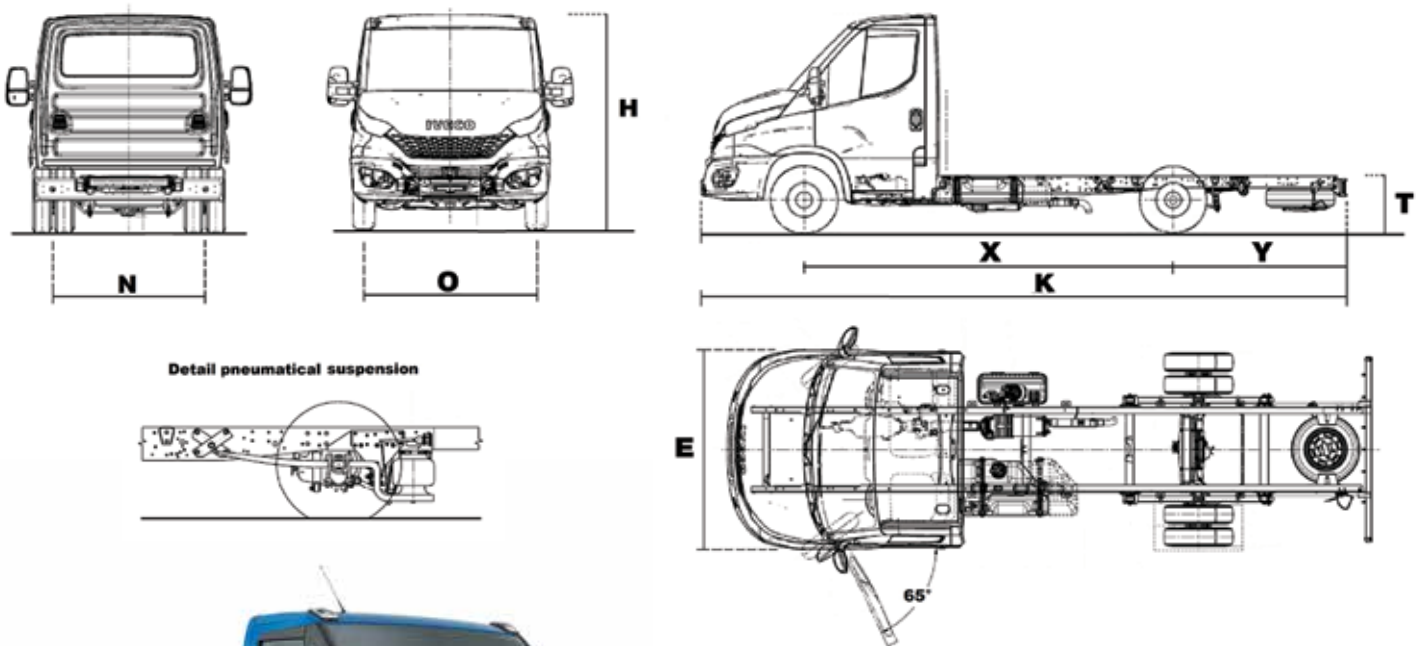

iveco.co.nz

IVECO

Your partner for sustainable transport

DAILY SPECIFICATIONS 70C DUAL CAB CHASSIS


DIMENSIONS (mm)

	70C18 Dual Cab Euro VI			70C21 Dual Cab Euro VI		
X Wheelbase	3750	4350	5100	3750	4350	5100
K Overall length	6593	7413	8278	6593	7413	8278
Body length	3385	4205	4983	3385	4205	4983
H Overall height – unladen	2335	2314	2298	2335	2314	2298
O Front track	1725	1725	1725	1725	1725	1725
N Rear track	1660	1660	1660	1660	1660	1660
T Unladen frame height at end of frame	900	900	900	900	900	900
Front ground clearance	179	179	179	179	179	179
Rear ground clearance	150	150	150	150	150	150
Y Rear overhang	1795	2015	2130	1795	2015	2130
E Overall width (Cab)	2010	2010	2010	2010	2010	2010
Turning circle kerb to kerb	13048	14866	17162	13048	14866	16078
Turning circle wall to wall	13694	15518	17790	13694	15518	17790



MASS (kg)

	70C18 Dual Cab Euro VI			70C21 Dual Cab Euro VI		
GVM	7000	7000	7000	7000	7000	7000
GCM	10500	10500	10500	10500	10500	10500
Towing capacity with braked trailer	3500	3500	3500	3500	3500	3500
Front axle capacity	2500	2500	2500	2500	2500	2500
Rear axle capacity	5350	5350	5350	5350	5350	5350
Kerb mass front axle	1638	1688	1701	1638	1688	1701
Kerb mass rear axle	1008	1000	1024	1008	1000	1024
Kerb mass total*	2646	2688	2725	2646	2688	2725
Payload capacity	4354	4312	4275	4354	4312	4275

* Kerb masses are with minimal fuel, spare wheel, tools and no driver

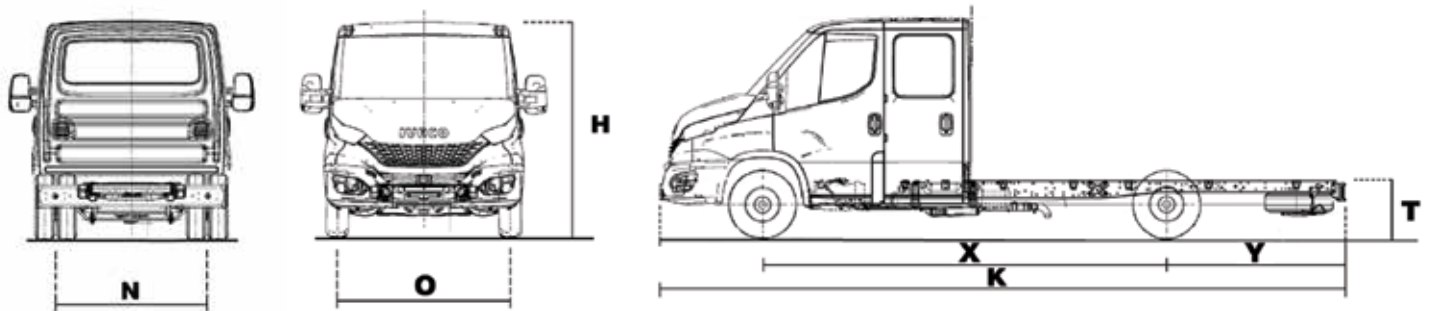

Detail pneumatical suspension

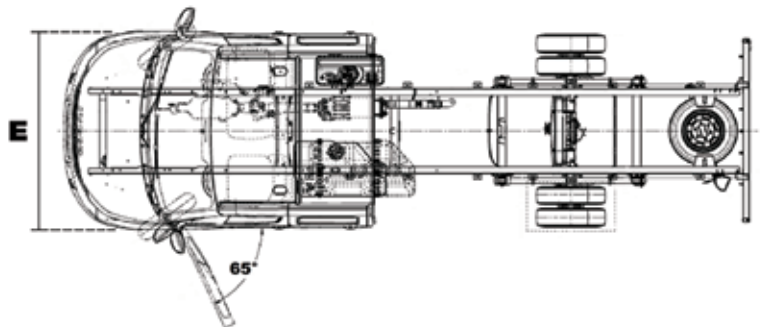

DAILY SPECIFICATIONS

ENGINE

180EVID FIC Euro 6 Heavy Duty engine with variable geometry turbine (VGT)

Maximum Output: 132 kW (180 HP) @ 3500 rpm

Maximum Torque: 430 Nm (317 ft-lbs) @ 1500 rpm

Emissions Technology: Exhaust Gas Recirculation and Selective Catalytic Reduction

Total Displacement: FIC: 3.0 litre

Exhaust: Muffler horizontally positioned on the right side and tailpipe located mid-way down right side of vehicle

Optional Engine: 210EVID - Engine FIC 210 Hp EURO 6 Heavy Duty with Electronically-controlled variable geometry turbine (e-VGT).

Maximum Output: 155 kW (210 HP) @ 3500

Maximum Torque: 470 Nm (347 ft-lbs) @ 1500

TRANSMISSION

Standard 6-speed Synchromesh Manual Transmission (manual not available with 210 hp engine option)

Type: 2840.6 OD 1st 5.375, 2nd 3.154, 3rd 2.041, 4th 1.365, 5th 1.000, 6th 0.791 OD, Rev.4.838

Optional Transmission (for 180 hp engine; standard for 210 hp engine): 8-speed ZF Torque Converter Automatic (Hi-Matic 8HP70L)

Type: 8HP70L 1st 4.696, 2nd 3.130, 3rd 2.104, 4th 1.667, 5th 1.285, 6th 1, 7th 0.839 -O.D. 8th 0.667 - D.O.D, rev. 3.297

STEERING

Type: Hydraulic power steering

Diameter: 380 mm diameter steering wheel with telescopic adjustment

CLUTCH

Type: Single dry plate hydraulic control

Diameter: 280 mm (180 hp)

FRONT AXLE & SUSPENSION

Capacity: 2100 kg (50C)

Capacity: 2500 kg (70C)

Suspension Type: Independent with adjustable steel torsion bar (50C and 70C)

REAR AXLE & SUSPENSION

Capacity: 3700 kg (50C)

Capacity: 5350 kg (70C)

Suspension Type: Rear parabolic spring

Optional Suspension: ECAS - Rear air suspension

Rear axle ratio: 50C Single Cab - 3.91: 1

Rear axle ratio: 70C Single Cab - 4.30: 1

Rear axle ratio: 50C Dual Cab - 4.44: 1

Rear axle ratio: 70C Dual Cab - 4.556: 1

Optional Differential: Driver Controlled Differential Lock

SAFETY

- **ESP9** - includes ABS (Antilock Braking System), EBD (Electronic Brake force Distribution), ASR (Anti Slip Regulator), MSR (Motor Drag torque control) Hill Holder (Assisted uphill departure), HBA (Hydraulic Brake Assist), LAC (Load Adaptive Control), TSM (Trailer sway mitigation), RMI (Roll Movement Intervention), ROM (Roll Over Mitigation) & Crosswind assist
- Four SRS airbags
- Advanced Emergency Braking System (AEBS)
- Traction Plus
- Hill Descent Control

BRAKES

Front / Diameter: Disc brakes / 290 mm (50C)

Front / Diameter: Disc brakes / 301 mm (70C)

Rear / Diameter: Disc brakes / 289 mm (50C)

Rear / Diameter: Disc brakes / 306 mm (70C)

Parking brake: Manual handbrake

Service brakes: Full ABS disc brakes with floating calipers with auto wear adjustment.

Hydraulically operated with vacuum servo assistance. Interdependent dual circuit configuration. Low Brake fluid level indicator - front & rear pad wear sensors. Asbestos free pads.

FUEL SYSTEM

100 litres with fuel cap location on passenger side (70 litres on 3000mm wheelbase)

20 litre Adblue

ELECTRICAL SYSTEM

Type: 12V

Battery: 12V-110 Ah (Smart-charging)

Smart Alternator: 12V-220 A

Trailer Wiring: Wiring to rear of chassis

CHASSIS

Type: C Section steel longitudinal side members and tubular cross members

WHEELS & TYRES

Wheels: Steel 5J x R16 (50C); Steel 6J x R16 (70C)

- Spare wheel included - positioned under chassis
- Dual rear wheels

Type Size: 195/75 R16 (50C); 225/75 R16 (70C)

CABIN FEATURES

- Driver, passenger and curtain airbags with seat belt pretensioners
- Bench seat with two occupant capacity, under seat storage and fold down table (single cab)
- Driver's seat with tilt function
- Second row seating for up to four passengers (dual cab models)
- Electric windows
- Exterior mirrors with integrated wide angle and direction indicators, heated and electronically adjustable
- Overhead console with storage shelf
- Large dual storage pockets in doors
- Document storage compartment
- Body builder connections
- 2 cup and 2x bottle holders
- Air conditioning
- Manual parking brake
- Ecoswitch Pro
- 2 spotlights
- 4 loud speakers
- Automatic headlights and wipers

LIGHTS

- Daytime running lights
- Optional full LED headlights (part of Hi-Vision Pack)
- Fog Lights

DASHBOARD

- 3.5" TFT display and silver dial rings
- TFT Display Panel includes: digital speedometer, ADAS (Advanced Driver-Assistance Systems) dashboard, ADAS quick menu, TPMS, oil, battery and service information. Navigation and phone multimedia, fuel economy, trip computer, vehicle settings, display settings and diagnostics.
- Engine oil level display
- Instrument light dimmer switch
- Dash-mounted gear lever
- 3 storage areas on top of dash
- Hi-Connect multimedia system with satellite navigation including Apple Car Play and Android Auto

SECURITY

- Central locking with remote control
- Steering lock
- Engine immobiliser
- Run Lock Function (Only available if Expansion Module option is selected) fitted as part of the Hi-Efficiency pack



DAILY OPTIONAL UPGRADE PACKS

HI-COMFORT PACK

- Automatic controlled air conditioning
- Leather covered steering wheel
- Open storage with inductive plus USB charge
- Heated and suspended drivers and passenger seats with lumbar support



HEATED SEAT



INDUCTIVE CHARGE



TPMS DISPLAY



AIR CONDITIONING

HI-EFFICIENCY PACK

- Tyre Pressure Monitoring System (TPMS)
- Run-Lock function



HI-SAFETY PACK

- Queue assist (Automatic Transmission only)
- City brake pro – Active Emergency Braking System (AEBS)
- Electric park brake
- Active cruise control

HI-VISION PACK

- L.E.D Headlights
- Automatic high beam control



DAILY OPTIONAL UPGRADES

3750 WB
4350 WB
4750 WB
5100 WB
FIC 3.0L engine: 210 hp / 470 Nm
8-speed Hi-Matic Automatic Transmission
3.92 Rear axle ratio
3.6 Rear axle ratio
4.3 Rear axle ratio
ECAS rear air suspension
Passenger and driver seat: heated, suspended, adjustable with lumbar support (part of the Hi-Comfort Pack)
Differential lock
Expansion module (part of the Hi-Efficiency Pack)
Third key with remote
Run lock function (part of the Hi-Efficiency Pack)
Full LED headlights (part of the Hi-Vision Pack)
5.6 tonnes re-rating

50C Single Cab	50C Dual Cab	70C Single Cab	70C Dual Cab
○	○	○	S
○	○	○	○
○	N/A	○	○
N/A	N/A	○	○
○	○	○	○
○	○	○	○
N/A	○	N/A	N/A
N/A	○	N/A	N/A
N/A	N/A	N/A	○
○	○	○	○
○	S	○	S
○	○	○	○
○	○	○	○
○	○	○	○
○	○	○	○
○	○	○	○
○	○	N/A	N/A

○ – Optional **S** – Standard N/A - Not Available

